

DS-D4025CS-1F
P2.5 640 × 480 Indoor LED



- Module cable-free design for easier installation
- Ultra-thin backshell, excellent flatness
- C13 power connector, global standard
- Ultra-high contrast ratio, excellent color performance
- 4:3 ratio cabinet, best choice for retail scene
- Modular structure design, support module, power supply, receiver card front maintenance


▪ Specification

	Model	DS-D4025CS-1F
Product Type	Product Type	Indoor small pitch full color LED
Cabinet	Pixel Configuration	SMD Triad LED
	Pixel Pitch	2.5 mm
	Pixel Density	160000 dots/m ²
	Modules Component	2 × 3
	Dimensions (W × H × D)	640 (W) mm × 480 (H) mm × 58.6 (D) mm (25.20" × 18.90" × 2.31")
	Resolution	256 × 192
	Area	0.3072 m ²
	Weight	7.55 kg
	Cabinet Material	Die cast aluminum box
	Maintenance Method	Complete pre maintenance
Module	Dimensions	320 mm × 160 mm
	Module Resolution	128 × 64
Display	White Balance Brightness	500 cd/m ²
	Color Temperature	3000-10000 K adjustable
	Viewing Angle	160° (H)/160° (V)
	Contrast Ratio	3000:1
	Color Uniformity	≤ ± 0.003Cx, Cy
	Brightness Uniformity	≥ 97%
Processing Performance	Driving Method	Constant current driving
	Frame Frequency	60 Hz
	Refresh Rate	3840 Hz
	Grey Level	Up to 16 bit
Power	Max. Consumption	≤ 450 W/m ²
	Average Consumption	≤ 150 W/m ²
	Input Voltage	100~240 VAC ± 10%
Working Environment	Working Temperature	-10 °C to 40 °C (10 °F to 104 °F)
	Working Humidity	10% to 60% RH (without condensation)
	Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
	Storage Humidity	10% to 85% RH (without condensation)
General	Package Dimensions (W × H × D)	758 (W) mm × 606 (H) mm × 442 (D) mm (29.84" × 23.86" × 17.40")
	Packing List	Qualification Card × 1 Warranty Card × 1 RoHS × 1 Several joint pieces, fixing screws and signal cables
	Net Weight	4 cabinets in 1 box: 19.3 kg; 24 lamp boards in 1 box: 12.0 kg

▪ Available Model

DS-D4025CS-1F

▪ Dimension

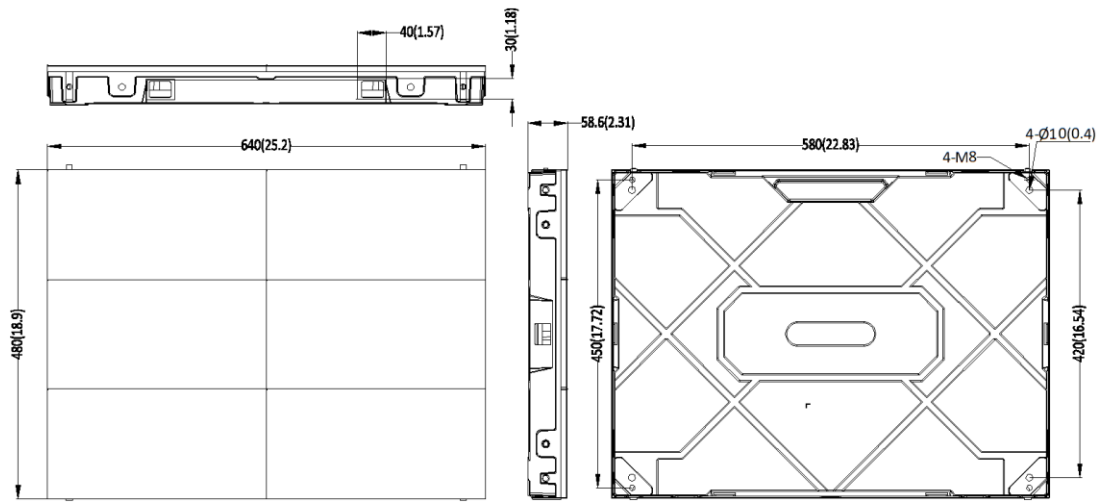

Unit:mm [inch]

SCALE	1:1
-------	-----

▪ Accessory

▪ Optional

DS-D40C08-H Sending Card



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq