

DS-D4012CS-2F**DS-D4012CS-2F, 1.25mm, 640*480MM**

- High refresh rate and Ultra-high contrast ratio, more delicate and smooth video, and more realistically image with excellent color performance
- 4:3 ratio cabinet, best choice for high cost performance
- Highly integrated and compatible cabinet with simple and lightweight design
- Cable-free design and Ultra-thin backshell for easier installation, easier to level the lamp boards, and make the splicing more flat
- Modular structure design, support module, power supply, receiver card front maintenance

▪ Specification


Product Model	
Product Model	DS-D4012CS-2F
Product Type	
Product Type	Indoor small pitch full color LED
Cabinet	
Pixel Configuration	SMD Triad LED
Pixel Pitch Category	P1.2
Pixel Pitch	1.25 mm
Pixel Density	640000 dots/m ²
Modules Component	2 × 3
Dimensions (W × H × D)	640 (W) mm × 480 (H) mm × 36 (D) mm (25.197" × 1.898" × 1.42")
Resolution	512 × 384
Area	0.3072 m ²
Weight	6 kg (13.23 lb.)
Cabinet Material	Die cast aluminum
Maintenance Method	Complete front maintenance
Module	
Dimension (W × H × D)	320×160mm
Module Resolution	256 × 128
Display	
White Balance Brightness	600cd/m ²
Color Temperature	3000-10000 K adjustable
Viewing Angle	160°(H)/160°(V)
Contrast Ratio	5000:1
Color Uniformity	≤ ± 0.003Cx , Cy
Brightness Uniformity	≥ 97%
Processing Performance	
Driving Method	Constant current driving
Frame Frequency	60 Hz
Refresh Rate	3840 Hz
Grey Level	Up to 16 bit
Power	
Max. Consumption	≤ 450 W/m ²
Average Consumption	< 150 W/m ²
Input Voltage	100~240 VAC ± 10 %
Working Environment	
Working Temperature	-10 °C to 40 °C (14 °F to 104 °F)
Working Humidity	10% to 60% RH (without condensation)
Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
Storage Humidity	10% to 85% RH (without condensation)

General	
Package Dimension (W × H × D)	758 (W) mm × 606 (H) mm × 606 (D) mm (29.843 " × 23.858 " × 17.402 ")
Packing List	Regulatory Compliance and Safety Information × 1 Several Joint pieces, Fixing screws and Signal cables Several LED lamp beads and IC components
Gross Weight	7 kg (15.4 lb.)
Net Weight	6 kg (13.23 lb.)
Bracket	
Modular Bracket	DS-DL116448W 1*1;DS-DL126448W 1*2;DS-DL226448W 2*2

▪ Available Model

DS-D4012CS-2F/A, 320*160 Cabinet Module

▪ Dimension

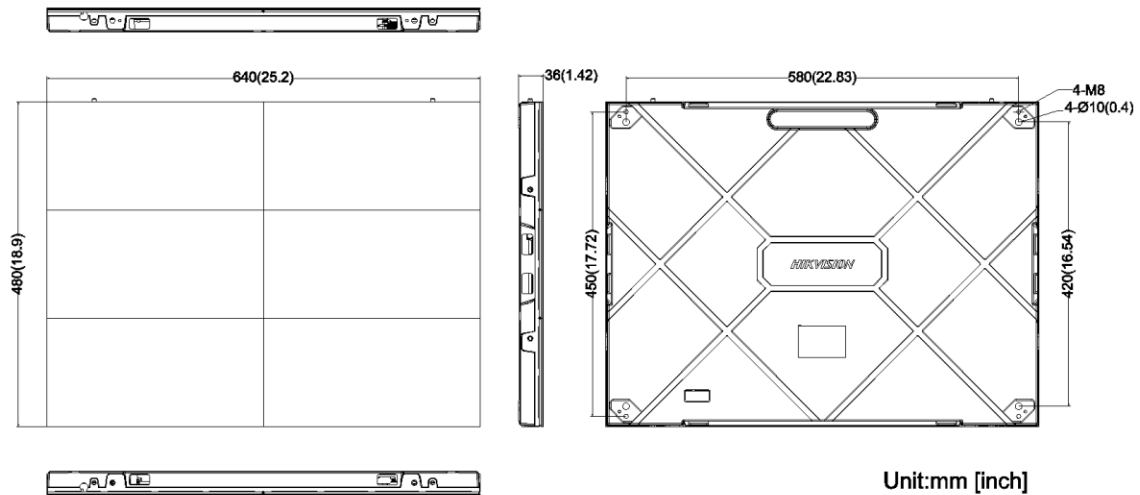

▪ Accessory

▪ Optional

DS-D40W-2F/PC	DS-D40S-2F	DS-D40S-2F/H	DS-1NP6UEC0

See Far, Go Further



www.hikvision.com
support@hikvision.com

